PSP POST & POLE PEELER

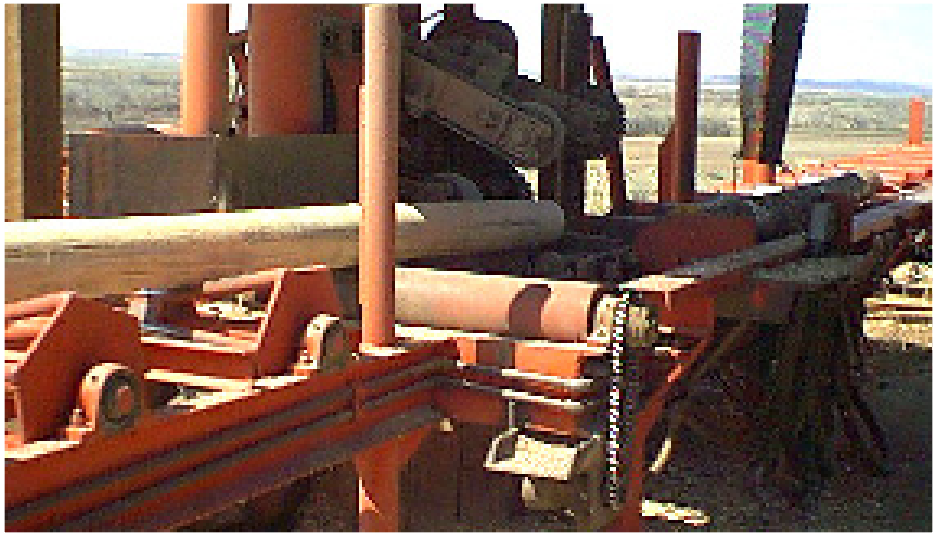

STANDARD EQUIPMENT

- Center section complete with debarking mechanism, combination carbide teeth and planer knife cutterhead with hydraulic table lock assembly.
- 20' infeed conveyor section with kicker assembly and hydraulic drive.
- 20' outfeed conveyor section, hourglass roll design, with 2-way kicker assembly and hydraulic drive.
- Hydraulic controled infeed shoe and top yoke assembly.
- Support legs 39" from bottom of leg to top of infeed conveyor section.
- Motor base (specify frame size) and V-belt drive.





SPECIFICATIONS

Note: Specifications may vary with equipment options

03052010

GENERAL

Power	electric, diesel or PTO
Horsepower	50 HP
Production	Up to 40 fpm
Capacity	3"-12" diameter , 6'-25' long
Weight	11,000 lbs.
Length	25' infeed/outfeed accommidates 30' material
Width	10'
Height	8' w/blower, 7'2" w/o blower
Discharge	Bark auger & blower, barn sweep
Debarker type	Split cutterhead debarks, then planes surface

OPTIONS

Machine to accommodiate 30' poles (25' infeed, 25' outfeed)
Bark blower and feed auger for waste removal complete with drive, elbow blowpipe, and connection collar
Blowpipe 8" x 10" extension section with connecting collar
PSP center section
Infeeds and outfeeds sold seperately (complete with drive)
Elevated operator's console, complete with access ladder , seat, and hose hook-up.
All weather cab. (operator's console must be added when ordering cab)
side moounted conbination air conditioner/heater unit for cab enclosure.

MORBARK, INC.
WINN, MICHIGAN
800-831-0042 989-866-2381
www.morbark.com